



Ovens

ADVANCE ovens

ADVANCE OVEN, AE-202

19010961

DIMENSIONS

		Article	Packed
Length	mm	1.162,00	1.200,00
Depth	mm	1.074,00	1.200,00
Height	mm	1.841,00	2.000,00
Weight	Kg	405,00	430,00
Volumen	m3	2,30	2,88

ELECTRICITY

Electric power	KW	62,40
230V - I+N		
230V - III	3x70+T -180 A	
400V - III+N	4x25+T - 125 A	

PLUMBING - WATER

Water consumption (lit/h)	40,00
Pressure (Kg/cm2)	2 - 4

GAS

Not used

STEAM

Not used

AIR

Not used

LEVEL SOUND

(dB) 62,00

ADVANCE OVEN, AE-202

High quality, fast cooking :

- Professional quality
- Easy to use and efficient
- Perfect results
- Affordable

Capacity for 40 1/1-GN trays or 20 2/1-GN trays.

Push-button and "Scrolling" controls.

5 cooking methods: Steam, Low-temperature steam, Regeneration, Combination and Convection (up to 300°C).

Preheating option.

Overnight cooking or low-temperature programme.

3 Speeds - 2 power ranges.

Cold-Down chamber cooling system.

"Auto-reverse" system to reverse fan rotation.

Electronic temperature probe.

Steam generator equipped with limescale detector.

Steam generator automatically empties every 24 hours of cooking.

Semi-automatic limescale removal system.

Error detection system.

"Repair service" mode system.

IPX-5 protection.

Retractable shower.

Built-in trolley and structure for trays.


Power: 62.4 KW.


Dimensions: 1,162 x 1,074 x 1,841 mm.

Accessories in option:



- Loading trolley for dishes CEP-202
- Thermal cover LT-202
- GN trays, grids, moulds...

Connections points	X	Y	Z	Diameter	Information
ELECTRICITY	973	729	110		
COLD WATER	1.072	491	110	3/4"	
DRAIN	89	157	110	30x25	
SOFT COLD WATER	1.072	571	110	3/4"	



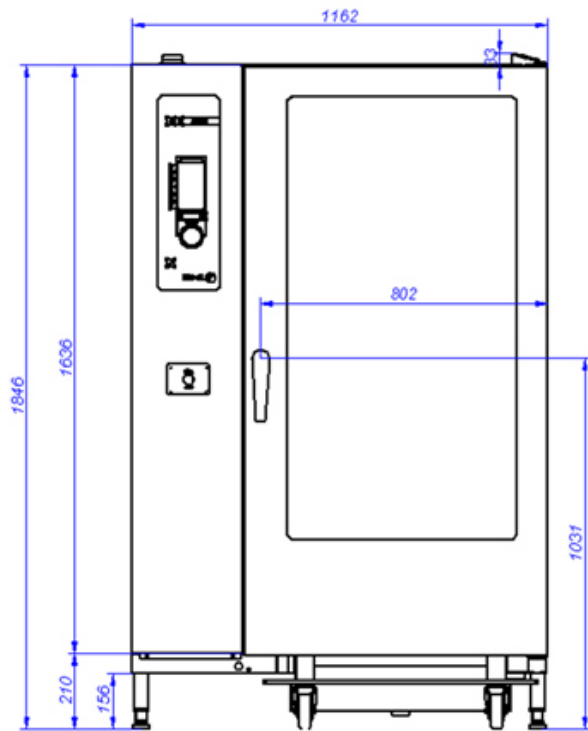

AE-202

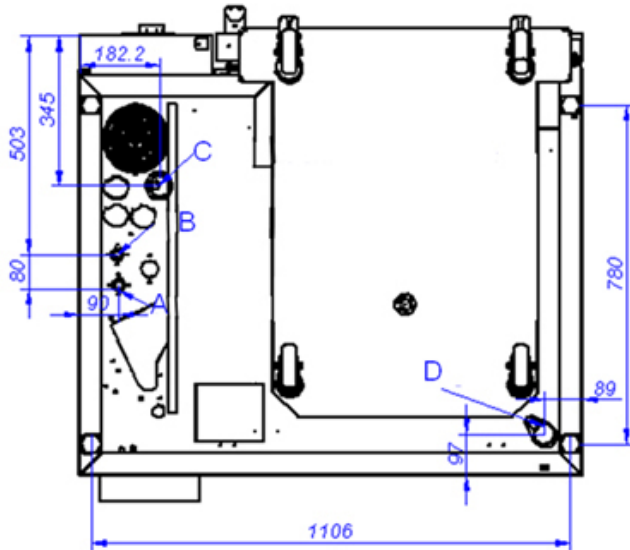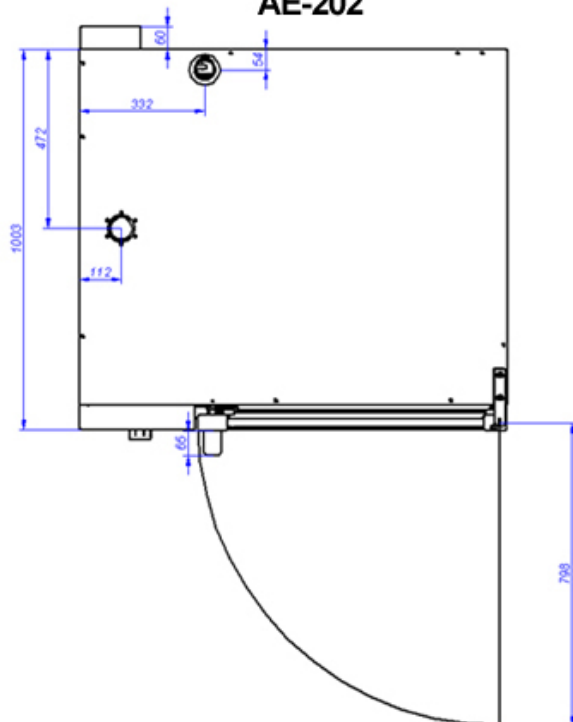

VISTA DE LA BASE DESDE LA PARTE INFERIOR
VIEW FROM THE BOTTOM OF THE MACHINE

A: Entrada de agua blanda
B: Entrada de agua dura
D: Desagüe

C: Alimentación eléctrica

A: Soft water inlet
B: Water inlet
D: Drain

C: Electrical connection