

MODEL FI-64W

High Production Dishwasher



Standard Features

- **High temperature** sanitation to protect your ware from harmful chemicals during final rinse. Your ware will come out cleaner and dryer than conventional sanitation methods.
- **High production** does not mean higher energy cost. With 35 racks per hour production requiring only 32 amp total draw and less than 1 gallon of water per rack, Fagor's FI-64W has efficiency written all over it.
- **Built-in electric booster** heater that will raise the temperature 70°F to the NSF required temperature of 180°F for sanitation.
- Unique "**Hot Water Assurance**" feature which guarantees 180°F final rinse.
- **Auto-fill** will take the guess work of filling your machine to ensure the proper water levels in your unit at all times.
- Built-in drain pump, **detergent & rinse** pumps come standard to give you all the options necessary to run your unit.
- This unit is designed to be used as a **Dishwasher or Glasswasher**.

Item # _____



Specifier Statement

Specified unit will be a Fagor FI-64W undercounter, front loading, high temperature dish or glass washer with built-in booster heater. Features dual time settings (90 & 180 seconds total time cycle), efficient 32 amp total draw (single phase) and 19 amp total draw (3 phase), .9 gallons of water per cycle. Stainless steel construction including top and side panels. Standard with liquid detergent and liquid rinse pumps. One year labor / one year parts warranty.

Options & Accessories

- All purpose rack
- Cutlery grid
- Peg rack
- Glassrack
- 16" base stand
- 6" base w/ legs
- Cutlery container
- Drain water tempering valve
- Water pressure regulating valve with gauge



Capacities		Water Consumption		Temperatures	
Racks Per Hr.	35	Gallons Per Hr.	36 gal. / 139 litre	Wash	150°F / 66°C
Dishes Per Hr.	875	Gallons Per Cycles	.9 gal. / 3.4 litre	Rinse	190°F / 88°C
Glasses Per Hr.	1260	Inlet Temperature (opimum)	140°F / 60°C		
Wash Tank	6.6 gal. / 24.9 litre	Flow Rinse pressure	15 - 25		
Operating Cycles*		Heating & Wash Pump Motor		Dimensions	
Wash Time (seconds)	70, 160	Electric Wash Tank Heater	2.8 kw	Width	23-1/2" (596.9 mm)
Dwell (seconds)	5	Electric Booster Heater	6 kw	Depth	23-1/2" (596.9 mm)
Rinse Time (seconds)	15	Motor (hp)	1 hp	Height	32-1/4" (819 mm)
Total Time (seconds)	90, 180			Max. Clearance	15-1/2" (387 mm)
				Shipping Weight	160 lbs (73 kg)
				Shipping Volume (cu. ft.)	15

Specifications Model FI-64W

Cabinet

Constructed of high-quality stainless steel, type 304 top and sides. Back is constructed of Galvanized aluminum. Interior cabinet is completely constructed in high-quality 16 gauge, 304 stainless steel. Door is completely stainless steel with a brushed aluminum door handle. Built-in electric booster heater, all stainless steel construction with 6 kw elements with 70° F rise in water temperature. Wash tank has a 2.8 kw element design to maintain water above 150° F. Individual

wash and rinse arms, both upper and lower, all stainless steel construction. Stainless steel filters above water line in 4 quadrants. Unit comes standard on 1-1/2" adjustable legs.

Controls

Controls are located on the top front of the machine. (2) analog temperature controls for wash and booster tanks. Water resistant start button. Dual time settings, 90 / 120 seconds, (1) drain setting. Automatic fill and door safety switch. Power light and running light.

Others

Standard built in detergent and rinse pumps. Unit is 100% serviceable from the front. Built in vacuum breaker and automatic drain. Fill and drain hose included.

Warranty

One year labor / One year parts. (Continental U.S.A. & Canada only)

Service Connections


- A** Water inlet 3/4" Female hose connector on 5' long flexible hose supplied with machine; Adaptor for 3/4" female garden hose fitting also supplied; 140°F / 60°C optimum water temperature; 15 - 25 psi flow rinse pressure.
- D** Drain 5' long, 1/2" I.D. flexible hose. Maximum 31 1/2" drain height permitted; Indirect connection to drain pipe.
- R** Electrical terminal block connection point - 208 - 240/60/1 or 3 ph.
- E** Electric power supply - Use wire suitable for at least 194°F / 90°C

Incoming Water Temp		140°F	110°F	80°F
Approx. racks per hour		35	35	24
Volts/Hz/Ph	Amps	Volts/Hz/Ph		Amps
208/60/1	28	208/60/3		16
220/60/1	30	220/60/3		18
240/60/1	32	240/60/3		19

*50 Hz models, consult factory

Caution Before connecting water to this unit, have water supply analyzed to make sure hardness is not greater than 2.0 grains and pH level is within the range of 7.0-8.5. Water which fails to meet these standards should be treated by the installation of a water conditioner. EQUIPMENT FAILURE CAUSED BY INADEQUATE WATER QUALITY IS NOT COVERED UNDER WARRANTY.

Warning Installation should be made by qualified personnel who will observe all specified local codes.

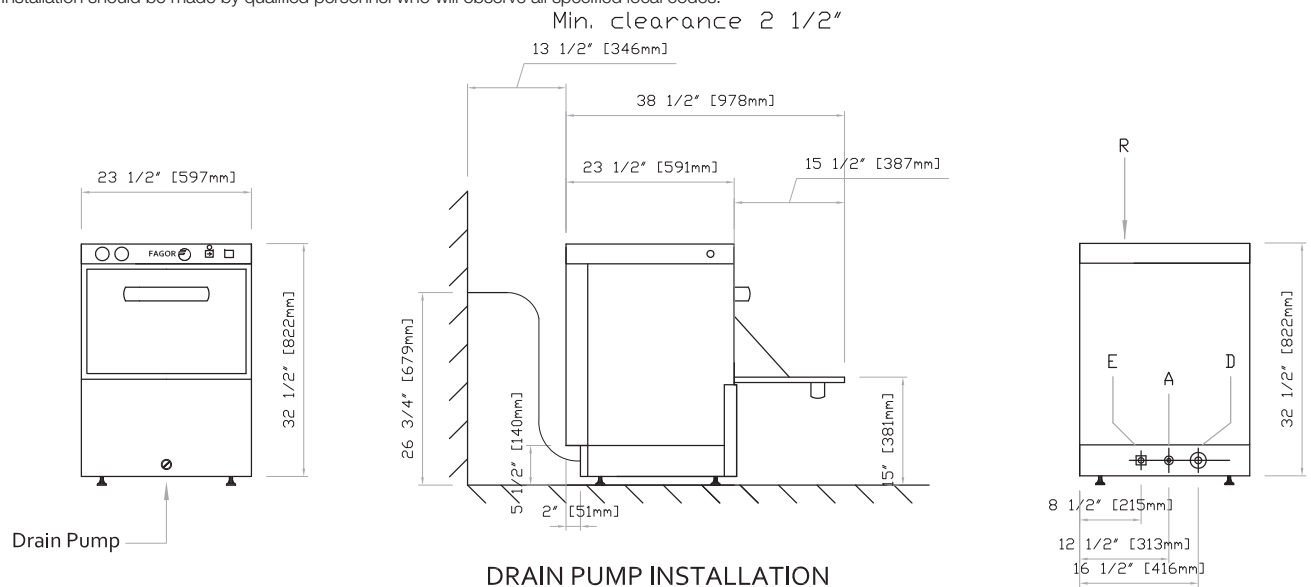

Front View

Side View

Back View

The manufacturer reserves the rights to modify materials and specifications without notice. Printed in the USA • 06/12