

ICE STORAGE EQUIPMENT 72" DOUBLE DOOR UPRIGHTS

Common Features

- 1 1/2" foamed in-place polyurethane insulation
- Convenient snout door spring hinge
- S/S baffle behind door prevents ice overflow
- Clear polycarbonate sliding view windows
- Factory installed 1" IPS plastic drain
- FOB origin on all freight unless pre-approved arrangements are made on a per order basis

Double Door Upright					
Model	Capacity	Width	Depth	Height	Weight
1415	1818lbs	72"	34"	56"	470lbs
• All stainless steel • Sleeves are W x D x 20"H and have a view window • Sleeves can be customized to add height, special doors and more • Sleeves may be shipped separate • Ice maker's that weigh over 800lbs each may require additional reinforcement. Call for quote.					

1415



Double Door Upright					
Model	Capacity	Width	Depth	Height	Weight
2215	2576lbs	72"	34"	76"	625lbs
• All stainless steel • Sleeves are W x D x 20"H and have a view window • Sleeves can be customized to add height, special doors and more • Sleeves may be shipped separate • Ice maker's that weigh over 800lbs each may require additional reinforcement. Call for quote.					

2215




ISE ADVANTAGE by Kloppenberg

1-800-346-3246



Page 10

www.kloppenberg.com



ICE STORAGE EQUIPMENT

TECHNICAL PRODUCT DATA

Part 1 – Uprights

1.1 GENERAL

- A. Height includes 6" adjustable legs and 1" for top closures. Add 10 1/2" to depth after Install for snout/door assembly.
- B. Poly snout(s) and set(s) of sliding view windows are tool-free install.
- C. Dimensions shown in inches and pounds.
- D. Application capacity is determined as 90% of total volume in cubic feet x 34lb./ cu. ft. avg. Ice density. Shipping weights are approximate and variable.

1.2 CLOSURES

- A. Equipped with a standard reinforced ABS top that will accommodate ice maker. Please call for special application requirements.
- B. Stainless steel closures are built to match ice manufacturing specification are included in price for all S/S lined bins (included in 705 and 905 models). Please specify ice maker to be used at time of order.
- C. S/S tops are fully gasketed, reinforced and cut to ice maker of choice.

1.3 ADJUSTABLE FEET

All models equipped with adjustable bullet and/or flanged feet.


1.4 MATERIALS

- A. Cabinets fabricated from T304 stainless steel sheet, (T316 stainless steel available at additional cost) conforming to ASTM A240. All exposed surfaces polished to a No. 4 brushed satin finish.
- B. SBB models have stainless steel fronts, sides, backs and bottoms.
- C. SS models have stainless steel fronts and sides with galvanized steel backs.
- D. Seamless molded polyethylene liners with 1 1/2" Foamed-in-place polyurethane insulation.
- E. Sliding view windows are 1/4" polycarbonate.

1.5 PRISON PACKAGE OPTIONS




- A. Prison package/Anti-vandalism package (quotes available upon request).
- B. Both single and double door units are available with these options; either is available individually or as a package.
 - 1. 20 gauge stainless steel liner (either seamed or fully welded) (24 ga. Standard).
 - 2. All stainless steel snout with lockable door.
 - 3. Stainless steel top closure.
 - 4. 6" stainless steel bolt down flanged legs.
 - 5. Stainless steel view window cover plate with security screws for authorized removal.

***All ice storage bins and shuttle systems are available
with a stainless steel liner, fully welded with coved
corners. Please call for pricing!***

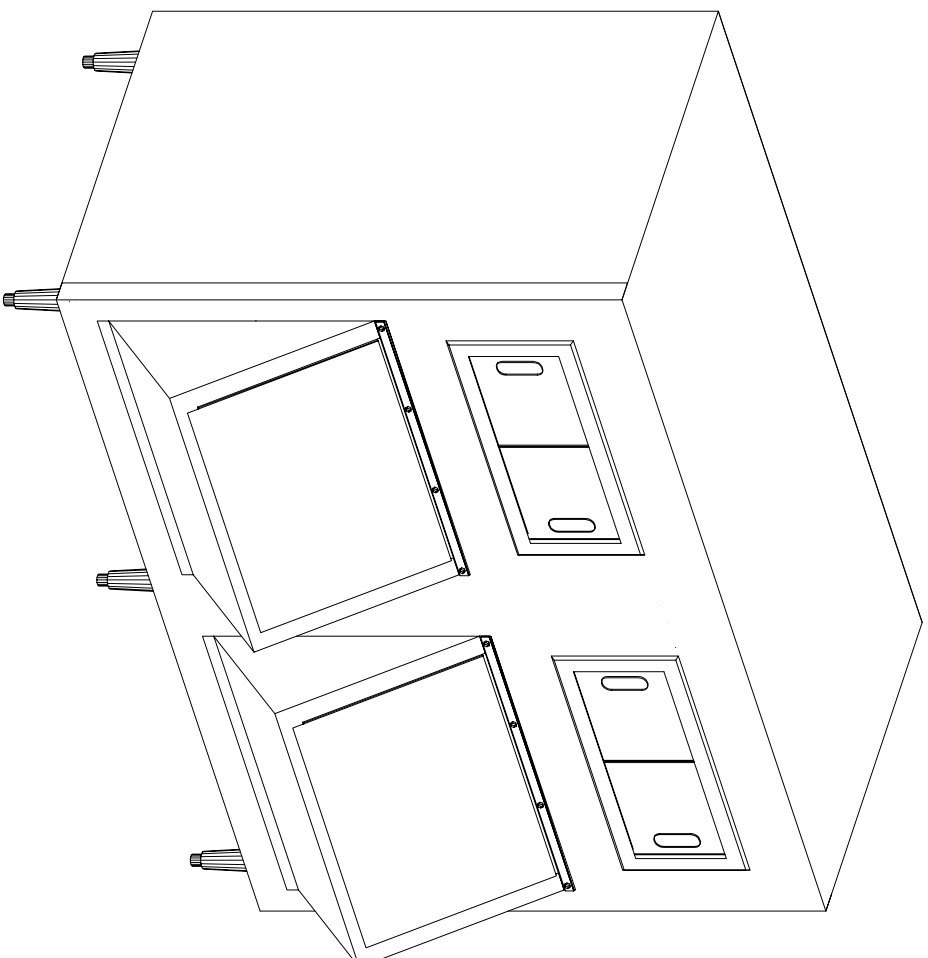

1455 UPRIGHT

-CLOSURES TO ACCOMODATE ALL ICE MACHINE MANUFACTURERS
 -STAINLESS STEEL CLOSURE & FRAME

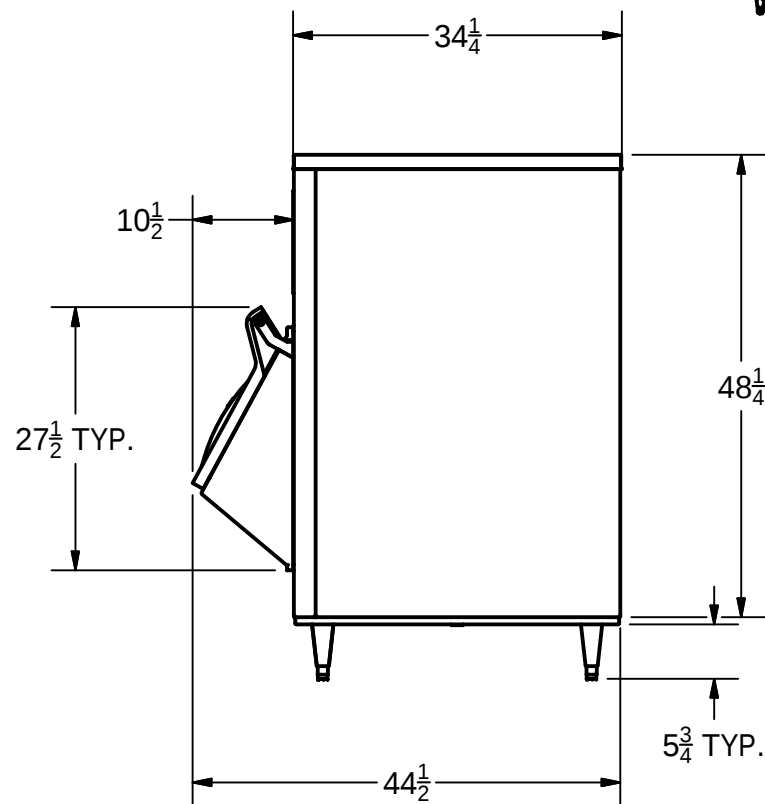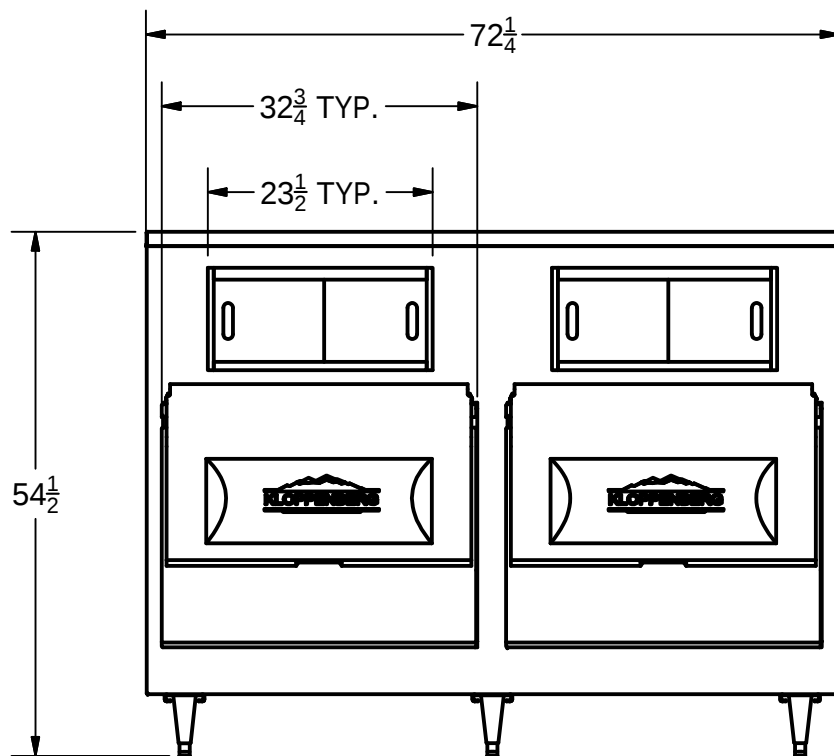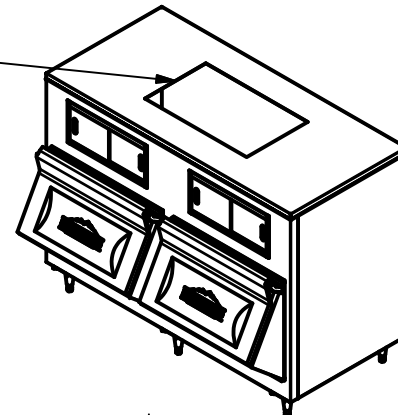

ICE HANDLING & STORAGE EQUIPMENT

THIS DOCUMENT AND ALL INFORMATION
 SHOWN HEREON ARE THE EXCLUSIVE
 PROPERTY OF KLOPPENBERG & COMPANY.
 USE OR DUPLICATION OF THIS DOCUMENT
 WITHOUT PRIOR WRITTEN CONSENT IS
 PROHIBITED, AND SHALL BE RETURNED
 UPON REQUEST.

UNLESS OTHERWISE SPECIFIED
 TOLERANCE IS $\pm 1/16"$

NO.	REVISION	DATE

TITLE:

1415 SS ISE Bin

MATERIAL:

DO NOT SCALE DRAWING

DATE: 6/27/2011

DRAWN BY: draft7

SCALE:

PART NO.

1415

SHEET 1 OF 1