

SM-6228H



SOFT SERVE FREEZER

PRODUCT INFORMATION

| | |
|-------------------------|-----------------------------------|
| Type | Counter Top |
| Flavors | 1 |
| Cooling | Air Cooled |
| Freezing Cylinders | 1x 1.7 L / 1.8 qt |
| Product Mix Hoppers | 1x 12.0 L / 12.7 qt |
| Output (4 oz Servings) | 30.0 qt / hr 241 servings / hr |
| Motor | 1x 1.2 HP, 900W |
| Compressor (Main) | 1x 4400 BTU, R404A |
| Compressor (Auxilliary) | 1x 480 BTU, R134A |

FEATURES

| | |
|-----------------------------|----------------------|
| Machine Controls | Single, Digital |
| Refrigerated Hopper | Yes, Digital Control |
| Hopper Agitator | Yes |
| Temperature Display | Yes |
| Standby Mode | Yes |
| Low Mix Indicator Light | Yes |
| Low Mix Indicator Alarm | No |
| Low Temperature Protection | Yes |
| Motor Amperage Protection | Yes, Mechanical |
| High Pressure Protection | Yes |
| Thermal Overload Protection | Yes |

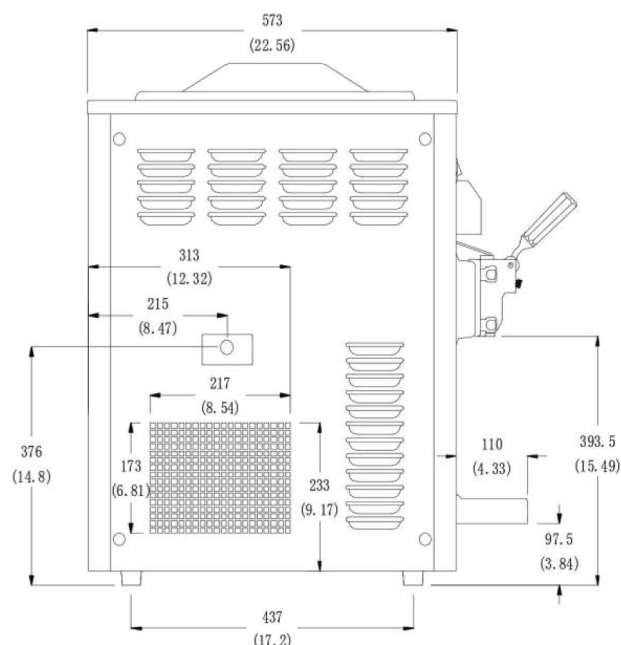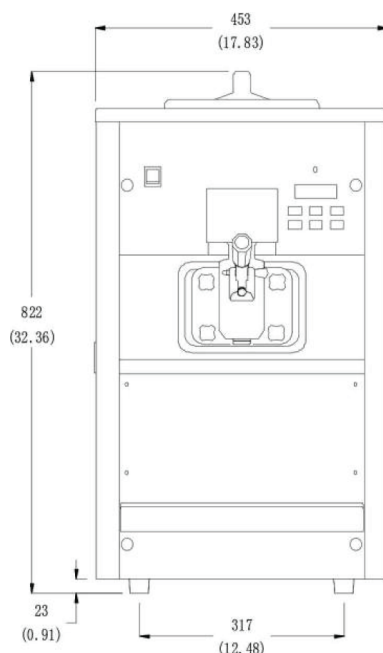

DESCRIPTION

A single flavor, gravity feed, countertop soft serve freezer. Capable of producing a variety of products including: Soft Serve, Frozen Yogurt, Ice Cream, Custards, and Sorbets. Digital control system automatically regulates and maintains consistent product quality. Refrigerated hopper and Standby Mode keeps product fresh, even overnight. Great Medium capacity machine for any application.

CUSTOM OPTIONS

Air Pump, Water Cooled, Air Chute, Spinner (1)

ELECTRICAL SPECIFICATIONS

| | Maximum Fuse Size | Min. Circuit Ampacity | Poles (P) Wires (W) |
|--------------|-------------------|-----------------------|---------------------|
| 208-230/60/1 | 1 x 20A | 1 x 13A | 2P / 3W |

Electrical Plug: 1x NEMA L6-20

SIZE SPECIFICATIONS

| | Machine | | Shipping | |
|------------------|---------|---------|----------|---------|
| Weight | 115 kg | 245 lbs | 120 kg | 267 lbs |
| Depth (mm / in) | 573* | 22.6* | 785 | 31.0 |
| Width (mm / in) | 453* | 17.9* | 520 | 20.5 |
| Height (mm / in) | 822 | 32.4 | 1010 | 39.8 |

Shipping Volume: 0.41 CBM / 14.56 CBF

** Machine Requires Minimum 6" Clearance on all sides*