



WE RAISE THE BAR. WE SET THE STANDARD.

Project _____

Item Number _____

Quantity _____

VS2000

High Volume Vegetable
Slicer/Shredder

Univex Corporation



High Volume Vegetable Slicer/Shredder

Models:

- ☐ **VS2000:** Vegetable Slicer / Shredder



Unit is not for shredding cheese or
grinding meat.

Features:

- 1 HP motor
- For high volume vegetable slicing and shredding
- Comes complete with vegetable slicer/shredding housing, S-knife, hub and shaft, and a 5/16" (8mm) shredding plate
- Use the S-knife for slicing lettuce, peppers, cucumbers, potatoes, carrots, cabbage, celery, onions, or other vegetables
- Use the 5/16" (8mm) shredder plate for cole slaw or breadcrumbs
- Runs attachments at 700rpm
- #12 Power Take-Off hub (PTO)
- On/off switch has removable operator key to prevent unauthorized operation

Standard Accessories:

- VS2000 power unit
- Vegetable slicing/shredding housing
- S-knife
- Hub and shaft
- 5/16" (8mm) shredding plate

Optional Accessories

- 1000907 3/32" (2.4mm) shredding plate
- 1000909 3/16" (4.8mm) shredding plate
- 1000910 5/16" (8mm) shredding plate
- 1000908 1/2" (12.7mm) shredding plate
- 1000512 1/2" (12.7mm) grind plate
- 1700400 S-1B stand

Warranty:

- One year, on-site parts and labor



Univex Corporation
www.Univexcorp.com

3 Old Rockingham Rd
Salem, NH 03079
United States of America


TEL: 800.258.6358
INTL TEL: 603.893.6191
FAX: 800.356.5614
INTL FAX: 603.893.1249



We Raise the Bar. We Set the Standard.

High Volume Vegetable Slicer/Shredder

VS2000

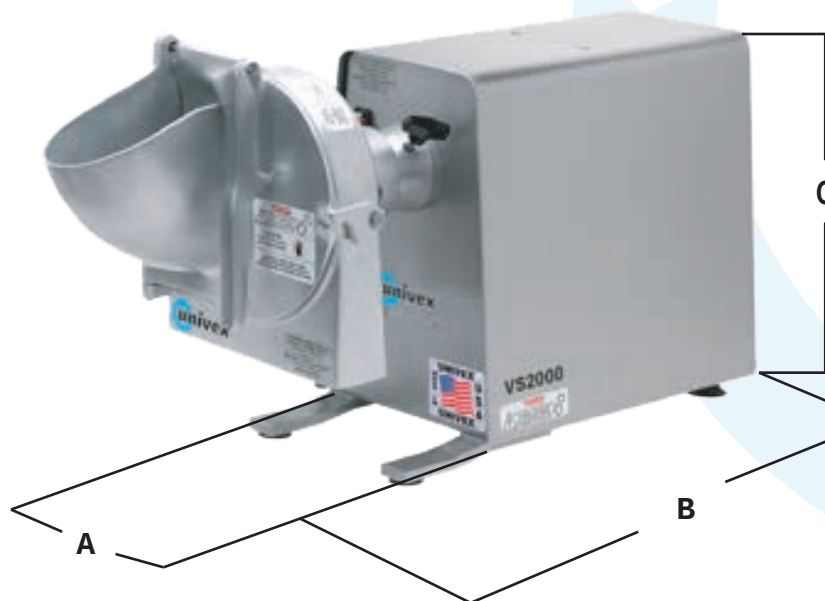

A: Width
11.5" (292mm)

B: Depth
34" (864mm)

C: Height
17.5" (445mm)

Drive: 2.5:1 reduction increases torque, ribbed poly-V belt, 729 rpm drive shaft supported by ball bearings in the PTO housing.

Drive Assembly: Completely enclosed in a powder coat finished 10 gauge steel housing and powder coat finished steel cover.

Switch: Rocker-type double-pole on/off switch located for access from the front or left side of unit. Also features a removable key to stop unauthorized use of machine.

VS9 Housing Attachment: Satin finished anodized aluminum housing with hinged feed chute door, latch and feed pusher. Made to attach to a #12 PTO Hub

Knife Assembly: 9" (229mm) adjustable S-knife assembly for use in the VS9 housing attachment.

Hub and Shaft: Die cast aluminum hub with stainless steel locking pins and shaft. comes with a 5/16" (8mm) shredding plate. For use in VS9 housing attachment.

Electrical Information (60Hz)

	Voltage	Phase	hp(kW)	Amps
Standard Voltage	115	1	1 (0.75)	11.5

Shipping Information

Net Weight	Shipping Weight	Overall Dimensions
90 lbs. (41Kg)	110 lbs. (50Kg)	24" (61cm) H x 18" (45.7cm) W x 25" (63.5cm) D



Univex Corporation
www.Univexcorp.com

3 Old Rockingham Rd
Salem, NH 03079
United States of America

TEL: 800.258.6358
INTL TEL: 603.893.6191
FAX: 800.356.5614
INTL FAX: 603.893.1249